

WQ

Submersible sewage pump



USING LIMITS

- ♦ Temperature of the liquid to $+40^{\circ}\text{C}$
- ♦ 10m maximum immersion depth
- ♦ Solids passage: from 25mm to 75mm

NEW DESCRIPTION

- ♦ Complete range with a full series submersible sewage pumps
- ♦ Better hydraulic characteristics
- ♦ Pump case in heavy gauge robust cast iron HT250
- ♦ Casing resistant to abrasion and long-lasting
- ♦ YE3 high efficient motor, with protection IP68 class F
- ♦ Impeller in two vanes, non-clogging, close but big fluid channels
- ♦ Discharge port with bolts, nuts and gaskets

APPLICATIONS


- ♦ Wastewater discharge in factories, shopping malls, hospitals, hotels
- ♦ Residential area, parking lot, municipal sewage, rainwater drainage
- ♦ Sewage discharge from sewage treatment plants and livestock farms
- ♦ Pumping of mud and grey water in construction sites and mines
- ♦ Clear water tank pumping for agriculture and aquaculture
- ♦ Wastewater discharge from biogas digesters
- ♦ Water supply and drainage in other occasions

MODEL CODE


For example








For example

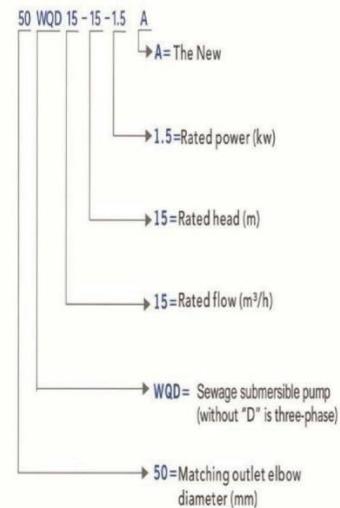



PERFORMANCE CURVE

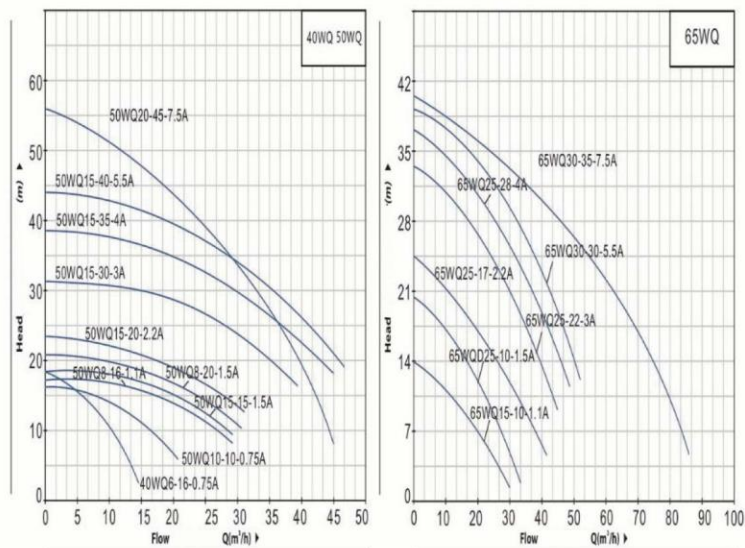

PERFORMANCE CURVE

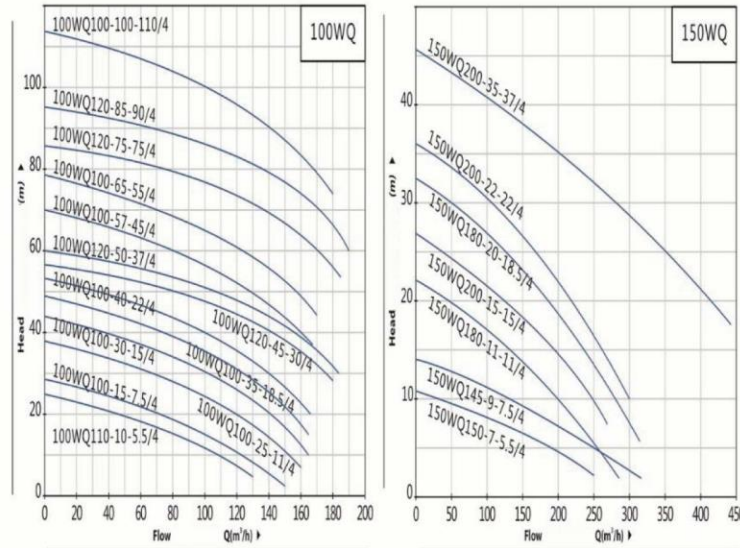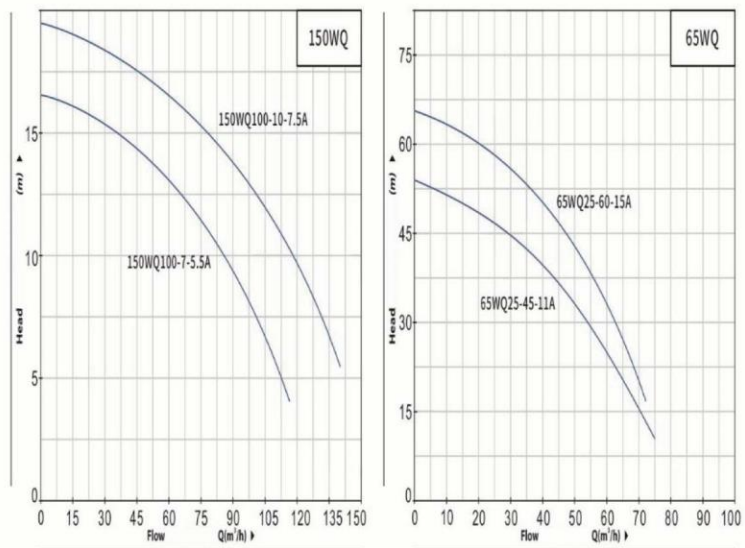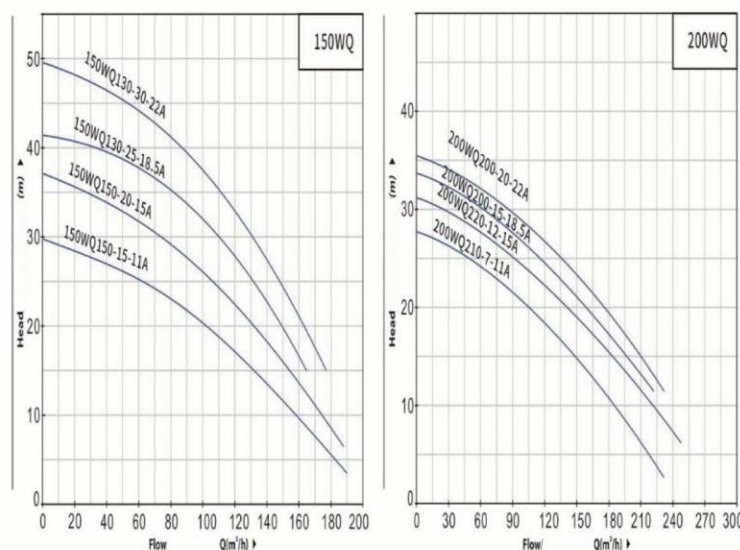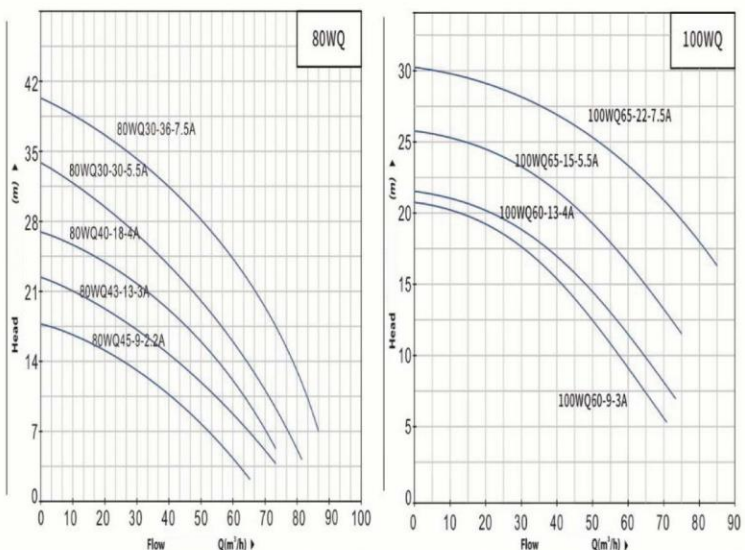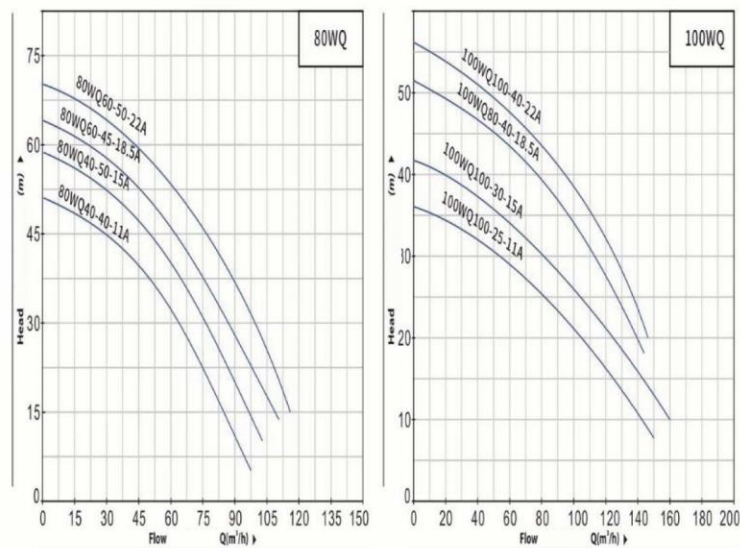

PERFORMANCE CURVE

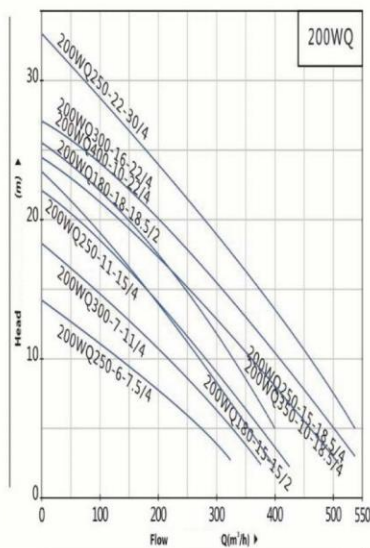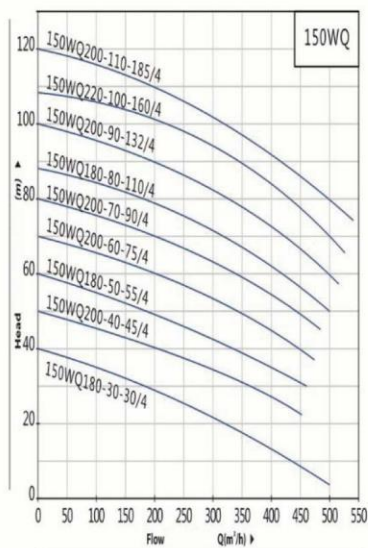

PERFORMANCE CURVE

